

CAD-COLOR® SPORTSFILM/ EXPRESSPRINT



PERFECT PRINTING IN 5 SECONDS: THE ALL-ROUNDER AMONG DIGITAL PRINTING MATERIALS.

Matt, printable textile printing film, which is perfect for printing and cutting small details. Very easy to cut and weed thanks to the polyester backing. The material can be further processed after a short drying time. Highly brilliant colors with high wash stability. The textile printing film can be printed with solvent and eco-solvent inks. **Print time only 5 seconds!**



AVAILABLE IN

- 50 cm x 25 m roll
- 75 cm x 25 m roll
- 100 cm x 25 m roll
- 150 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- 100% Polyester*
- Polyester-Cotton blends

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or printing.

APPLICATION INSTRUCTIONS

Temperature: 130° C / 150° C
Time: 10 sec. / 5 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Hot peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® High Tack
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 60° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

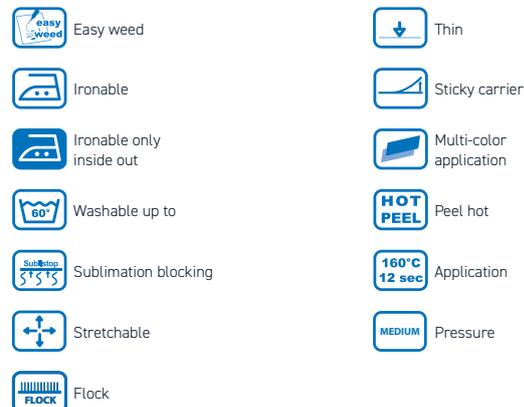



DIGITALPRESSUREFOLIE, SPECIALLY FOR SUBLIMATION-DYED POLYESTER TEXTILES

Digital printable and plottable white polyurethane film, specially developed for printing on sublimation-dyed polyester textiles. It has a barrier layer that prevents the sublimation dyes from penetrating your motif.



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Sublimation-dyed polyester*
- 100% Polyester-Cotton blends
- Softshell*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 140° C
 Time: 10 sec.
 Pressure: Medium (#4-6 with Hotronix®)
 Carrier: Hot-warm peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® High Tack
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

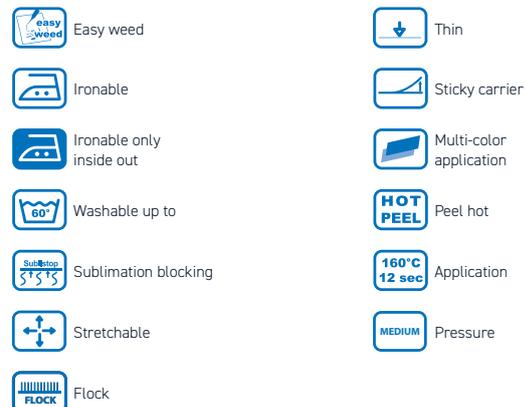



IN 5 SECONDS TO PERFECT PRESSURE: THE ALL-ROUNDER AMONG DENDIGITAL PRESSURE MATERIALS.

Matt, printable textile printing film that is perfect for printing and cutting small details. Very easy to cut and weed thanks to the polyester backing. The material can be further processed after just a short drying time, with highly brilliant colors and high wash stability. The textile printing film can be printed with solvent and eco-solvent inks. **Print time only 5 seconds!**



AVAILABLE IN

- 50 cm x 25 m roll
- 75 cm x 25 m roll
- 100 cm x 25 m roll
- 150 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- Polyester-Cotton blends
- 100% Polyester*
- 100% Nylon**

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 130° C / 150° C
 Time: 10 sec. / 5 sec.
 Pressure: Medium (#4-6 with Hotronix®)
 Carrier: Hot peel/ **Nylon: Cold peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® High Tack
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 60° C. Please do not use fabric softener or bleach. Wash inside out and iron.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

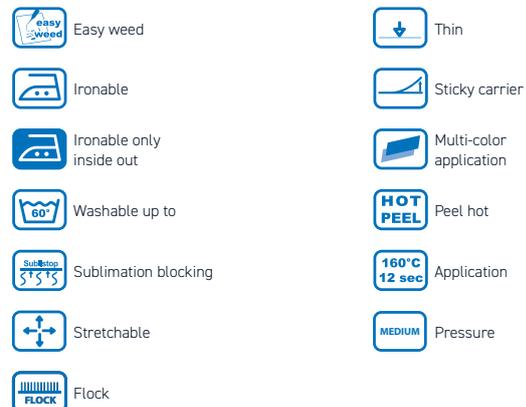

CAD-COLOR® SUPERTEK™ CLEAR MATT



HIGH-THICKNESS, TRANSPARENT DIGITAL PRESSURE FILM.

Polyurethane textile printing film, which can also be used to produce large motifs with a soft feel. It has a polyester backing and is equipped with the STIX² adhesive, which enables printing on all common types of textile. No need to apply MagicMask, as the material can be printed mirror-inverted and transferred directly to the textile, reducing production time and material costs. Great effects can also be achieved on dark textiles without printing. For brilliantly colored prints, use only on light-colored textiles.



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- 100% Polyester*
- Polyester-Cotton blends
- Lycra®- / Spandex blended
- Most nylon textiles*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 160° C
Time: 10 sec.
Pressure: Medium (#4-8 with Hotronix®)
Carrier: Warm / Cold peel

ACCESSORIES RECOMMENDED


- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight. We recommend not exceeding a storage period of 12 months.

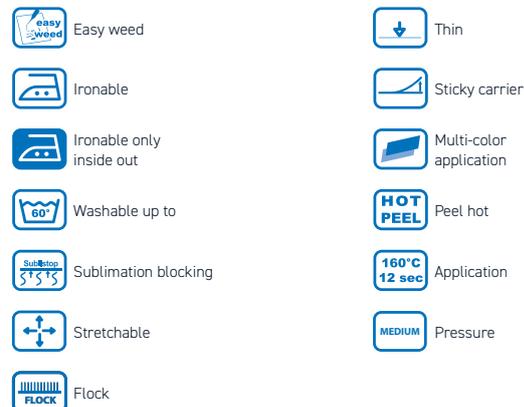

CAD-COLOR® GLITTER



PRINTABLE GLITTER FOIL

With CAD-COLOR® Glitter, prints become exciting eye-catchers - in photorealistic quality and with great glitter particles.



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- Polyester-Cotton blends
- 100% Polyester*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 150° C
Time: 12 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Hot peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® High Tack
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 30° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

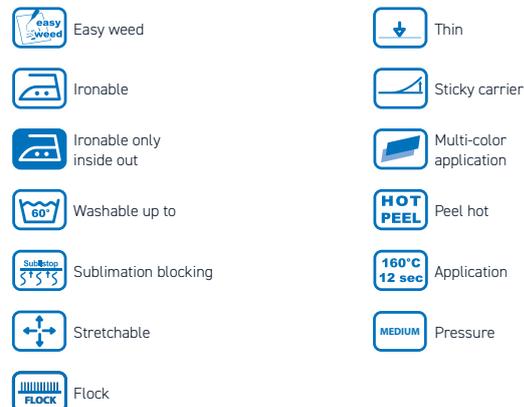

CAD-COLOR® GLOW IN THE DARK



IDEAL FOR PROMOTION & CHILDREN'S TEXTILES: THE DIGITAL PRESSURE FILM THAT LIGHTS UP!

Soft, polyurethane textile printing film that glows after being charged by a light source. Ideal for producing textile prints for promotional teams or children's textiles.

Make your designs glow!



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- Polyester-Cotton blends
- 100% Polyester*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 150° C
Time: 12 sec.
Pressure: Medium (#4-8 with Hotronix®)
Carrier: Hot-warm peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® High Tack
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

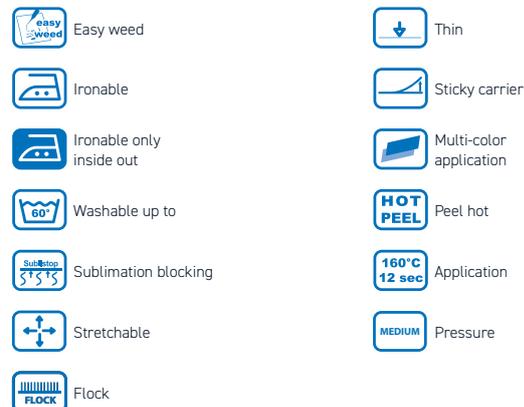

CAD-COLOR® SOLVENT FLOCK



BRILLIANT COLORS AND A SOFT SURFACE THANKS TO THE FLOCK QUALITY

CAD-COLOR® Solvent Flock is a printable flock film with optimum opacity. Brilliant color reproduction and great wash stability. After washing, the flock fibers straighten up again so that the feel becomes even softer.



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- Polyester-Cotton blends
- 100% Polyester*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or pressing.

APPLICATION INSTRUCTIONS

Temperature: 180° C
Time: 12 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Cold peel

ACCESSORIES RECOMMENDED


- CAD-COLOR® MagicMask® Flock
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting, wash inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat and sunlight.

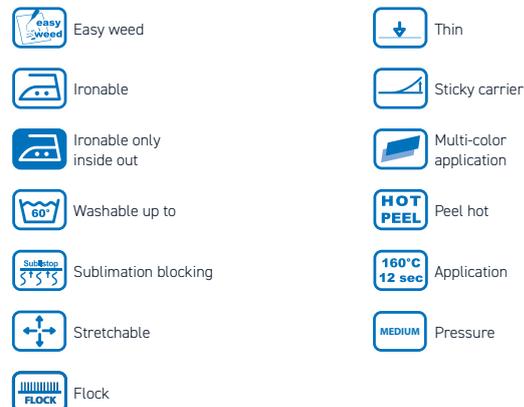



SOFT, PRINTABLE FLOCK

Printable flock film, specially developed for printing with sublimation ink. It can be printed both directly and indirectly. Optimum opacity and high flock fibers characterize this digital printing film.



AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100% Cotton
- Polyester-Cotton blends
- 100% Polyester*

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. Cutting too deep will cause difficulties when weeding or printing.

APPLICATION INSTRUCTIONS

Temperature: 170° C - 180° C
Time: 30 sec.
Pressure: Light (#2-4 with Hotronix®)
Carrier: Cold peel

ACCESSORIES RECOMMENDED

- CAD-COLOR® MagicMask® Flock
- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers
- Squeegee

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting and can be ironed directly.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

